


DESAIREADORES Tipo Bandeja - Trey



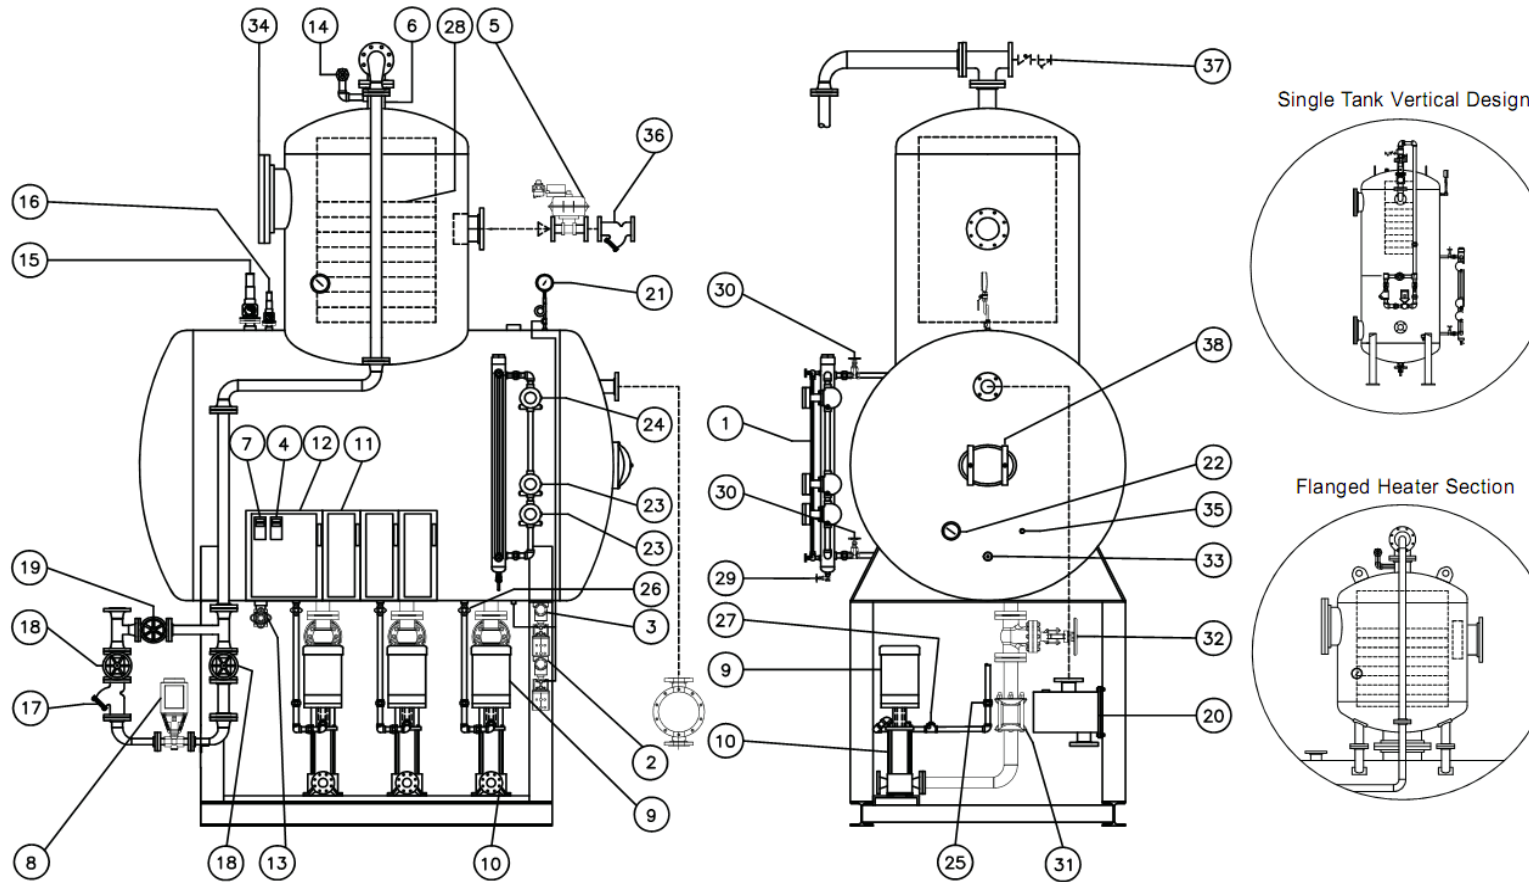

- | | | | |
|--|--------------------------|--|----------------------------|
| 1 Water Level Indicator | 11 Starter | 21 Pressure Gauge W/Cock | 31 Pump Suction Coupling |
| 2 Pressure Transmitter | 12 Control Panel (Nema1) | 22 Temperature Gauge W/Thermometer | 32 Pump Suction Gate Valve |
| 3 Differential Pressure Transmitter(Level) | 13 Gate Valve (Drain) | 23 Low Water Alarm & Cut Off Switch | 33 Magnesium Anode |
| 4 Pressure Controller | 14 Gate Valve (Vent) | 24 High Water Alarm Switch | 34 18" Diameter Manway |
| 5 Pressure Control Valve | 15 Safety Relief Valve | 25 Recirculation Orifice Union | 35 Chemical Feed Quill |
| 6 Make-Up Nozzles | 16 Sentinal Relief Valve | 26 Recirculation Gate Valve | 36 Y-Strainer (Steam) |
| 7 Make-Up Controller | 17 Y-Strainer (Make-Up) | 27 Recirculation Check Valve | 37 Pumped Return |
| 8 Make-Up Control Valve | 18 Gate Valve (Make-Up) | 28 Stainless Steel Tray Assembly | 38 12x16 Manway |
| 9 Boiler Feed Pump Motor | 19 Globe Valve (Make-Up) | 29 Gate Valve (Water Column Drain) | |
| 10 Boiler Feed Pump | 20 Overflow Trap | 30 Gate Valve (Water Column Isolation) | |

FEATURES

COUNTER FLOW TRAY design provides guaranteed removal of all dissolved oxygen in excess of .005 cc/liter from 5% to 100% of deaerator capacity.

ELECTRONIC INSTRUMENTATION FOR MODULATING LEVEL control includes a HART compatible differential pressure transmitter, PID controller, and motorized control valve.

MULTIPLE CONFIGURATIONS: vertical single tank, standard “tank car” type, or flanged heater section, all providing the same high quality deaeration.

ONLY STAINLESS STEEL components come in contact with undeaerated water. Trays and tray box are all stainless steel.

A.S.M.E. Code and National Board stamped receivers - 50 psi. Standard vessel options include stress relieving, non-destructive testing and full vacuum.

CUSTOM ENGINEERED PACKAGED SYSTEM includes boiler feedwater pumps and quality components to insure reliable service.

ADVANTAGES

Counter Flow Tray type deaerators are capable of accepting high percentages of condensate returns without adverse effects on performance. This is possible because the deaeration process does not require a flow of steam for scrubbing. All second stage scrubbing is done by the cascading process through the trays. The counter flow design provides maximum performance because the cleanest incoming steam contacts the water that requires final deaeration, thus stripping out the last traces of oxygen.



GUARANTEED PERFORMANCE from 5% to 100% of load standard sizes ranging from 6,900 lbs/hr to 300,000 lbs/hr (up to 1,000,000 #/hr upon request)

CUSTOM ENGINEERED PACKAGED SYSTEM results in a small foot print, minimal onsite installation costs, and a single source of responsibility for all major components.

DESAIREADORES

Tipo Aspersión - Jetspray



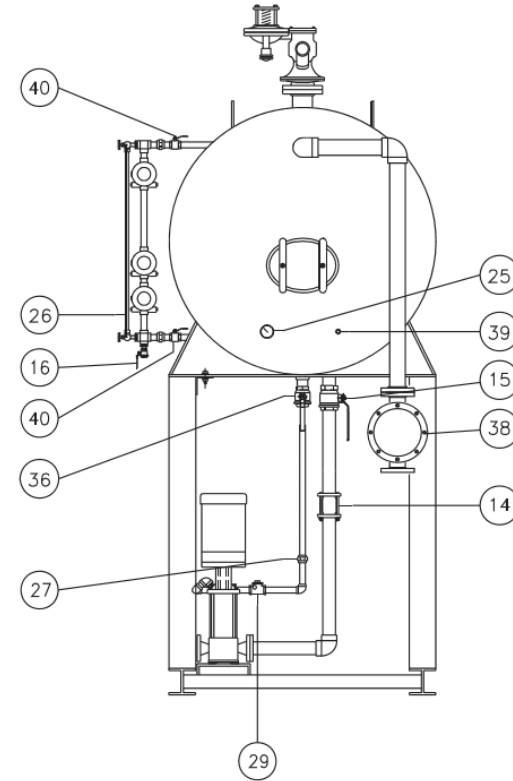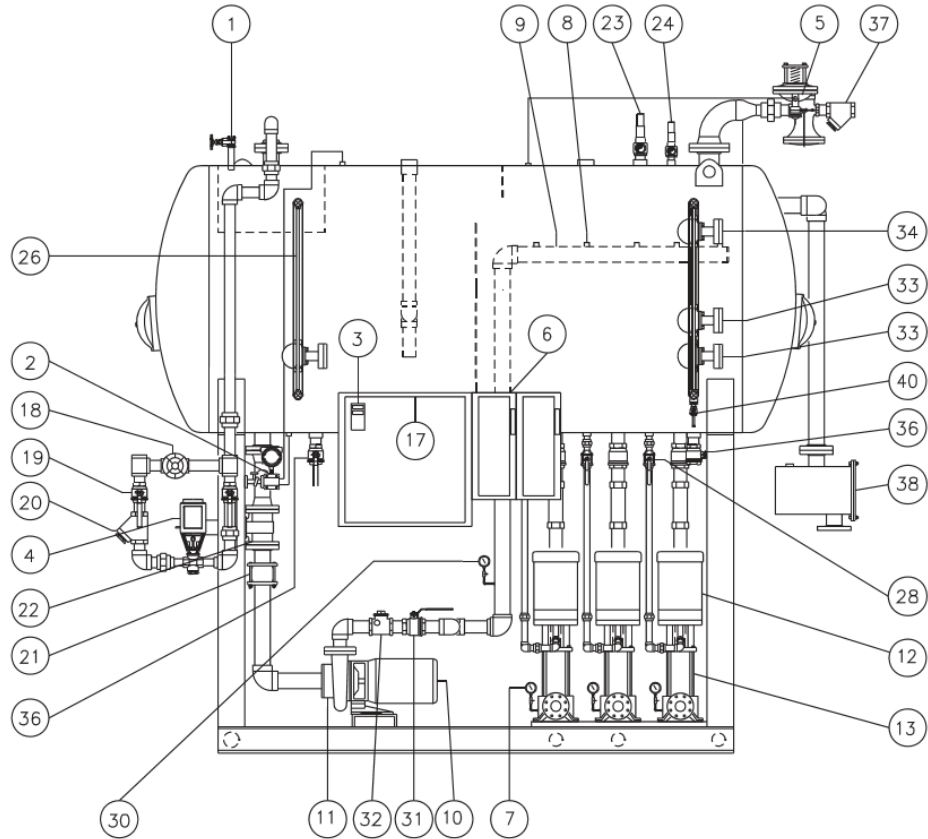

- | | | |
|-------------------------------------|--------------------------------------|--|
| 1. Gate Valve (Vent) | 15. Suction Ball Valve | 29. Check Valve (Recirculating) |
| 2. Level Transmitter | 16. Ball Valve (Column Drain) | 30. Discharge Pressure Gauges W/cock (Recycle) |
| 3. Level Controller | 17. Control Panel (Nema 1) | 31. Discharge Ball Valve (Recycle) |
| 4. Make-up Control Valve | 18. Globe Valve (Make-up Inlet) | 32. Discharge Check Valve (Recycle) |
| 5. Pressure Control Valve | 19. Ball Valves (Make-up Inlet) | 33. Low Water Alarm & Cut-off Switch |
| 6. Starter | 20. Y-strainer (Make-up Inlet) | 34. High Water Alarm Switch |
| 7. Discharge Pressure Gauges w/cock | 21. Suction Coupling (Recycle) | 35. Emergency By-pass (not shown) |
| 8. Spray Nozzles | 22. Suction Gate Valve (Recycle) | 36. Ball Valve (Drain) |
| 9. Spray Scrubbing Manifold | 23. Safety Valve Set@50# | 37. Y-strainer (Steam Inlet) |
| 10. Recycle Pump Motor | 24. Sentinel Relief Valve: Set @ 20# | 38. Overow Trap |
| 11. Recycle Pump | 25. Thermometer: 50-550° F | 39. Chemical Feed Quill |
| 12. Boiler Feed Pump Motor | 26. Water Gauge Glass | 40. Ball Valve (Column Isolation Valve) |
| 13. Boiler Feed Pump | 27. Orice Union | |
| 14. Suction Coupling | 28. Ball Valve (Recirculating) | |



INDUSTRIAL STEAM



MODEL NUMBER	MAXIMUM LOAD		RECEIVER SIZE, in.	SYSTEM CAPACITY TO OVERFLOW		RECYCLE PUMP			APPROXIMATE OVERALL DIMENSIONS, in.			APPROXIMATE SHIPPING WEIGHT**
	LBS/HR	HP		GALS.	MIN.	GPM	HEAD	HP	HT*	L	W	
1SF5-CS	3,450	100	30 x 72	240	34.3	10	60	3/4	90	108	60	1,680
2SF5-CS	6,900	200	30 x 84	280	20	20	60	3/4	90	120	60	1,760
3SF5-CS	10,350	300	30 x 120	380	18.1	30	60	1	90	156	60	2,000
4SF5-CS	13,800	400	36 x 120	540	19.3	40	60	1	96	156	66	2,270
6SF5-CS	20,700	600	42 x 120	750	17.9	50	60	1/2	102	156	72	2,970
8SF5-CS	27,600	800	48 x 120	1,000	17.9	80	60	2	108	157	78	3,680
10SF5-CS												
12SF5-CS	34,500	1,000	54 x 120	1,300	18.6	90	60	3	114	159	84	4,195
15SF5-CS	41,400	1,200	60 x 120	1,600	19	100	60	3	120	162	90	4,710
	51,750	1,500	66 x 120	2,020	19.2	135	70	5	126	164	96	5,240
18SF5-CS	62,100	1,800	66 x 144	2,420	19.2	170	70	5	126	188	96	6,215
	72,450	2,100	66 x 168	2,800	19	185	70	5	126	214	96	6,745
21SF5-CS	82,800	2,400	66 x 192	3,150	18.8	200	60	5	126	238	96	7,480
24SF5-CS												
30SF5-CS												
36SF5-CS	100,000	3,000	72 x 192	3,640	17.3	275	60	7	132	240	102	9,210
	125,000	3,600	72 x 216	4,120	16.3	315	60	1/2	132	264	102	9,890
45SF5-CS	150,000	4,500	84 x 192	5,020	16.3	375	60	7	144	245	114	11,820
	200,000	6,000	84 x 240	6,180	15.2	500	60	1/2	144	294	114	13,615
60SF5-CS	250,000	7,500	96 x 216	7,300	14.5	625	60	10	156	267	126	13,965
	300,000	9,000	96 x 240	8,100	13.3	750	60	15	156	297	126	14,865
75SF5-CS								15				
90SF5-CS								20				



INDUSTRIAL STEAM



FEATURES

CONSTANT RECYCLING guarantees deaeration of all dissolved oxygen in excess of .005 cc/liter from 0% to 100% of deaerator capacity.

ELECTRONIC INSTRUMENTATION FOR MODULATING LEVEL control includes a HART compatible differential pressure transmitter, PID controller, and motorized control valve.

SEPARATE DEAERATING & MIXING SECTIONS offer a two stage continuous cycle which provides .005 cc/l deaerated water during all load conditions regardless of surges from the system

ONLY STAINLESS STEEL
components come in contact with undeaerated water.

A.S.M.E. CODE and NATIONAL BOARD
stamped receivers at 50 psig is standard

CUSTOM ENGINEERED PACKAGED SYSTEM and low NPSH pumps require a small foot print and minimal headroom

ADVANTAGES

Industrial Steam's exclusive constant recycling feature, and the use of a partitioned receiver, provide the advantages of a two-tank system as a single package. These advantages are available without the necessity for onsite erection or field installed piping. Expanded deaerating sections are standard for surge condensate loads.

GUARANTEED PERFORMANCE FROM 0% to 100% of capacity regardless of load conditions is unmatched by any other deaerator. The STEAM FLOW also carries a 10-year vessel guarantee without the use of a lining.

CUSTOM ENGINEERED PACKAGED SYSTEM and low headroom with low NPSH pumps. Selection of quality components insures reliable service, and there is a single source of responsibility for all major components.

OPERATION

Makeup water is sprayed through a stainless steel spring-loaded nozzle into a stainless steel internal vent condenser which is located in the mixing section. This incoming water is heated instantly by direct contact with steam. Returned condensate enters below the water level to eliminate pressure decay caused by surging returns.

The deaerated water is then pumped into the deaerating section where it is blasted through stainless steel wide angle, full-cone unrestricted nozzles. The last traces of oxygen are shaken out at the source of the purest steam. The pumped transfer rate is approximately 125% of deaerator capacity, which enables the deaerator to furnish the boiler with deaerated water from start up. Deaeration is accomplished from 0% to 100% load, and thermal stratification is eliminated.

Excess deaerated water, which is not required by the boiler, recycles into the deaerating section through the compartment overflow. This deaerated water is blended with makeup water and is constantly rescrubbed. Non-condensable vapors are expelled from the top of the deaerator through the internal vent condenser.

